Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 02/06/2024

Owner	r Informa	ation					
Owner	Name:	Steeplechase Condo			Contact Pers	on: Steeplech:	ase Condo
Addre	ss:	2827 Aintree Lane, Bldg	C		Home Phone	•	
City:		Naples	Zip: 34112		Work Phone:		
Count	y:	Collier County			Cell Phone:		
Insura	nce Comp	pany:			Policy #:		
Year o	f Home:	1991	# of Stories: 2		Email:		
accom	pany this	cumentation used in valid s form. At least one photog nsurer may ask additiona	graph must accompan	y this form to validat	e each attribu	ite marked in	
		de: Was the structure built to HVHZ (Miami-Dade or E					or homes
		in compliance with the FE ate after 3/1/2002: Building					it application
	1996 pr	he HVHZ Only: Built in co covide a permit application /YYYY)///	with a date after 9/1/1	3C-94: Year Built 994: Building Permit	For h Application D	omes built in 1 ate	1994, 1995, an
~		nown or does not meet the		r "A" or "B"			
nur	mber OR	ings: Select all roof covering Year of Original Installation vering identified.					
	2.1 Roof (Covering Type	Permit Application Date	FBC or MDC Product Approval	¥	Installation or Replacement	Provided for Compliance
	☐ 1. Asp	shalt/Fiberglass Shingle	//				
		ncrete/Clay Tile	//				
	3. Me	tal	<u>07/07/2011</u>	PRBD20110701064		2011	
	4. Bui	lt Up	//	-			
	☐ 5. Me	mbrane	//	-			
	☐ 6. Oth	er	//	-			
\checkmark		oof coverings listed above tion OR have a roofing per				-	
		oof coverings have a Miam permit application after 9/					
	C. One	or more roof coverings do r	not meet the requireme	nts of Answer "A" or "	В".		
	D. No ro	oof coverings meet the requ	irements of Answer "A	a" or "B".			
3. Ro	of Deck A	Attachment: What is the we	eakest form of roof decl	k attachment?			
	A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.						
Y	maximu lumber/	rood/OSB roof sheathing warm of 24"inches o.c.) by 8d Tongue & Groove decking n 6 inches in width)OR-	common nails spaced with a minimum of 2	a maximum of 6" inch nails per board (or 1 na	nes in the field ail per board i	OR- Dimens feach board is	ional equal to or
Inspe	ectors Init	ials MM Pro	operty Address	2827 Aintree Lane, Bldg	C , Naples, FI	34112	_
_		ion form is valid for up to					- cture or
inacc	uracies fo	ound on the form. (Rev. 01/12) Adopted by Ri		a no material changes	nave pecii illa	Page 1 of	

		in the field	n the field or has a mean uplift resistance of at least 182 psf.							
		D. Reinford	D. Reinforced Concrete Roof Deck.							
		E. Other:	. Other:							
		F. Unknow	F. Unknown or unidentified.							
		G. No attic	access.							
4.			Attachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/varethe inside or outside corner of the roof in determination of WEAKEST type)	alley jacks						
		A. Toe Nai	ils							
			Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter an the top plate of the wall, or	d attached to						
			Metal connectors that do not meet the minimal conditions or requirements of B, C, or D							
	Mi	nimal cond	litions to qualify for categories B, C, or D. All visible metal connectors are:							
		Secured to truss/rafter with a minimum of three (3) nails, and								
		~	Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visit corrosion.							
		B. Clips								
			Metal connectors that do not wrap over the top of the truss/rafter, or							
			Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does no nail position requirements of C or D, but is secured with a minimum of 3 nails.	ot meet the						
	✓	C. Single V	Wraps							
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secu minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.	red with a						
		D. Double	ouble Wraps							
			Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or							
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured both sides, and is secured to the top plate with a minimum of three nails on each side.	to the wall on						
		E. Structural Anchor bolts structurally connected or reinforced concrete roof.								
		F. Other								
		G. Unknown or unidentified								
		H. No attic	access							
5.	wal		<u>y:</u> What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry.)							
	V	A. Hip Ro	Hip roof with no other roof shapes greater than 10% of the total roof system perimeterfeet; Total roof system perimeter:feet; Total roof system perimeter:							
		B. Flat Ro	Roof on a building with 5 or more units where at least 90% of the main roof area has roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total rarea sq ft							
		C. Other R	•							
6	Saa	ondowy Wo	tow Desigtance (SWD) (standard underlayments or hot manned falts do not qualify as an SWD)							
0.		•	ter Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR)	liad dimaatly						
		to the s	also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment apposheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental meaning from water intrusion in the event of roof covering loss.							
		B. No SW	TR.							
	\checkmark	C. Unkno	wn or undetermined.							
I	nspe	ctors Initials	s MM Property Address 2827 Aintree Lane, Bldg C , Naples, FL 34112							

spacing that is shown to have an equivalent or greater resistance than 8d common nails spaced a maximum of 6 inches

This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.


7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable. Non-Glazed **Glazed Openings Opening Protection Level Chart** Openings Place an "X" in each row to identify all forms of protection in use for each Windows opening type. Check only one answer below (A thru X), based on the weakest Entry Garage Glass Garage Skylights or Entry form of protection (lowest row) for any of the Glazed openings and indicate the Block Doors Doors Doors Doors weakest form of protection (lowest row) for Non-Glazed openings. Not Applicable- there are no openings of this type on the structure Χ Χ Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights) A В Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights) C Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007 Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, D ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance Opening Protection products that appear to be A or B but are not verified N Other protective coverings that cannot be identified as A, B, or C X No Windborne Debris Protection Χ Χ Χ Χ A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above). • Miami-Dade County PA 201, 202, and 203 • Florida Building Code Testing Application Standard (TAS) 201, 202, and 203 • American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996 • Southern Standards Technical Document (SSTD) 12 • For Skylights Only: ASTM E 1886 and ASTM E 1996 For Garage Doors Only: ANSI/DASMA 115 ☐ A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above exist B. Exterior Opening Protection-Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above): • ASTM E 1886 and ASTM E 1996 (Large Missile - 4.5 lb.) • SSTD 12 (Large Missile - 4 lb. to 8 lb.) • For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.) ☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist ☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above □ C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above). C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist ☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above ☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above Inspectors Initials MM Property Address 2827 Aintree Lane, Bldg C, Naples, FL 34112

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

	with protective c	overings no	t meeting the re	quirements of	of Answer "A",	"B", or C"	on) All Glazed openionsystems that appear	
	"A" or "B" with no documentation of compliance (Level N in the table above). □ N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist							
	□ N.2 One or N	More Non-G	•				e, and no Non-Glazed	
			lazed openings	is classified	as Level X in t	he table abo	ove	
✓	A. None or Some	e Giazeu Op	<u>benings</u> One of n	noie Giazed	openings class		evel X in the table abo	
						_	ALIFIED INSPEC Is who may sign th	
Qualifie	d Inspector Name:	, 11(2), 11		License Type:	, a noting of		License or Certificate #:	
	cos Machado			Home Ins	spector	ni ni	HI14832	
•	on Company: th Florida Inspecto	rs				Phone: 786-21	8-2844	
<u>Qua</u>	<u>lified Inspector</u>	· - I hold a	n active licen	se as a: (c	heck one)			
✓	Home inspector lice training approved by						tory number of hours of y exam.	hurricane mitigation
	Building code inspe							
	General, building or					Statutes.		
	Professional engine			-				
	Professional archite			-			40	: C: titi
	verification form pu					ry quamicano	ons to properly complete	a uniform miugation
I, Nand part of the application	(print name) professional engin sponsible for his/h ified Inspector Sig dividual or entity is subject to inves	_am a qualineers only) I ner work.	had my employ Marcos Machado ngly or through the Florida Div or to criminal p	nnd I person vee (Marc	ally performe os Machado int name of insp Date: gence provide urance Fraud a (Section 627.7) perform (02/06/ es a false or and may be 11(4)-(7), F	the inspection and I a 2024 fraudulent mitigation subject to administrational Statutes The Ges as if the authorized	agree to on verification rative action by Qualified
reside	-	this form an	d that proof of ic	dentification	was provided	to me or my	yee did perform an ins y Authorized Represe -	•
obtai		count on an	insurance pren	nium to whic	ch the individu		on verification form	
	definitions on this are as offering pro			rposes only	and cannot be	e used to cer	rtify any product or o	construction
			<u></u>				, Naples, FL 34112	
	s verification form curacies found on		up to five (5)	years provide	eu no material	cnanges ha	ve been made to the	structure or


Photos

Photos

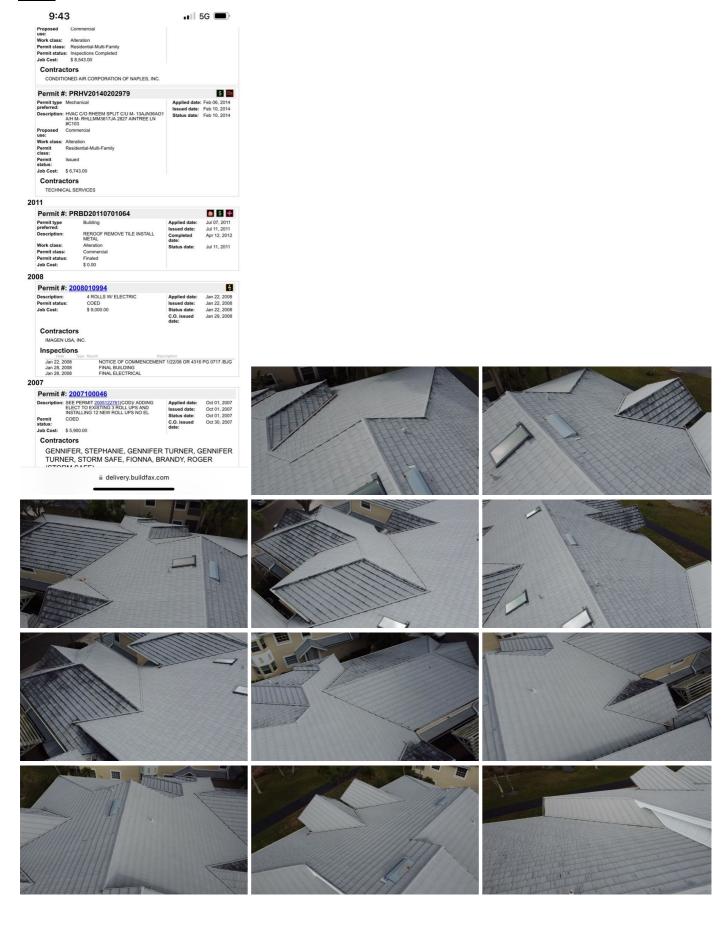


Inspectors Initials MM Property Address 2827 Aintree Lane, Bldg C, Naples, FL 34112

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

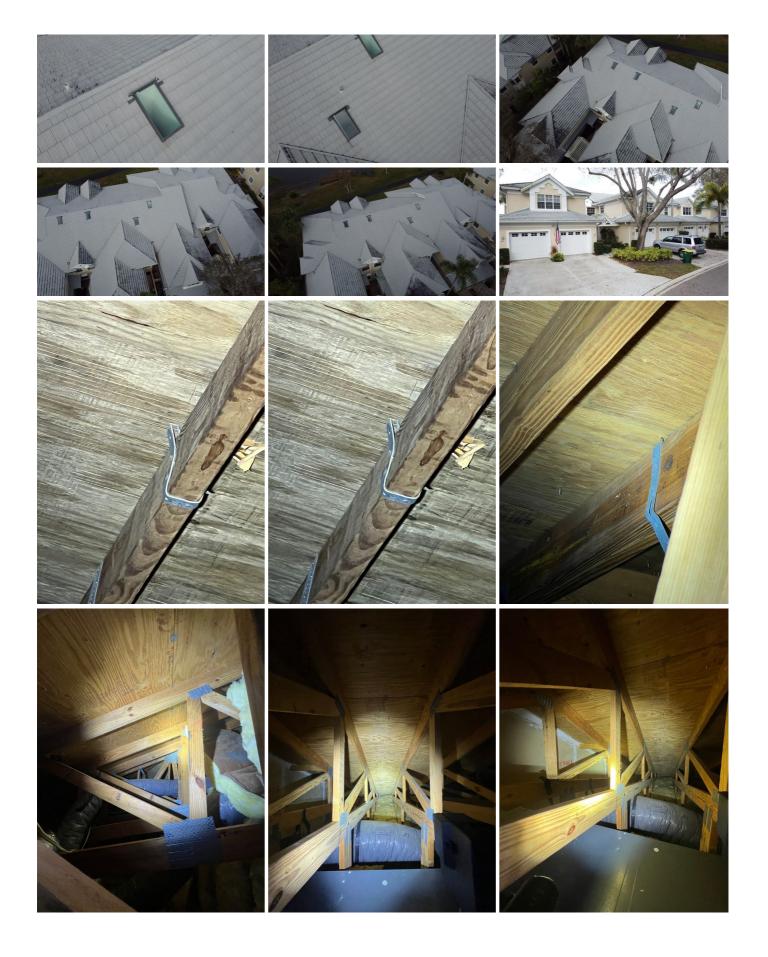

 Inspectors Initials
 MM
 Property Address
 2827 Aintree Lane, Bldg C, Naples, FL 34112

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

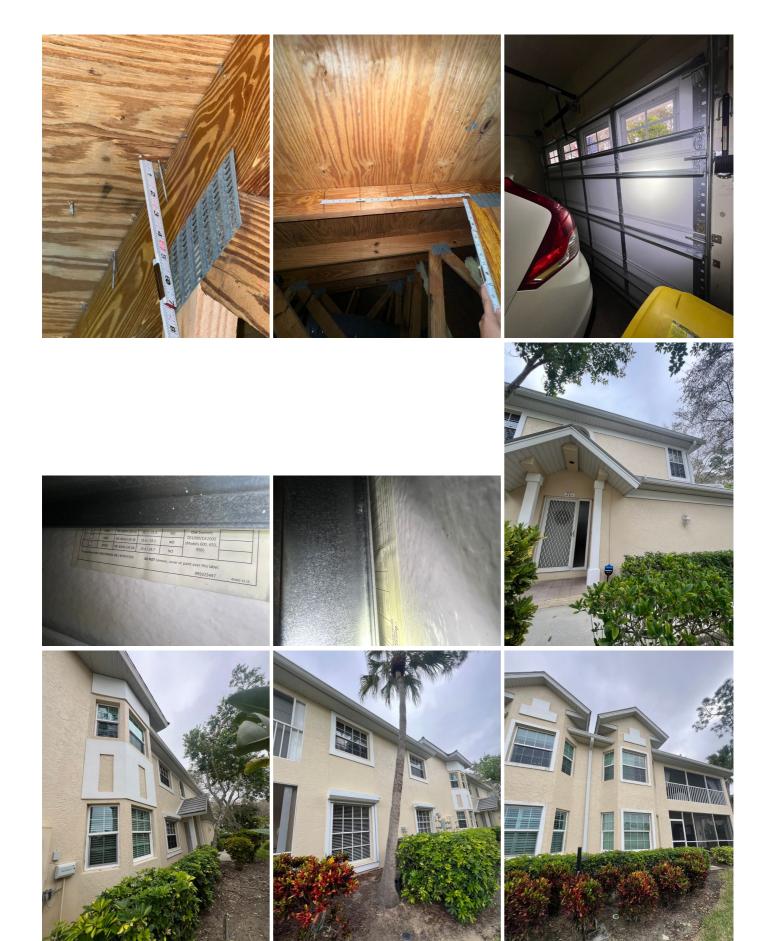

Inspectors Initials MM Property Address 2827 Aintree Lane, Bldg C, Naples, FL 34112

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.



Inspectors Initials MM Property Address 2827 Aintree Lane, Bldg C, Naples, FL 34112

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.



Additional Information